

DUST

EXTRACTORS

FOR FLOOR PREPARATION



WELCOME TO THE DUST EXTRACTION



THE DEPURECO FACTORS WORLD



XM 20 JET CLEAN®



2,2 HP
POWER

5425.01 in²
FILTER

6 gal Bin
CAPACITY


— Compact single-phase dust extractor with large filtering surface and semi-automatic filter cleaning system. It is ideal for dry and difficult dust. It can be connected to a power tool and remotely controlled. It has a 20 L detachable container.



2 POWERFUL BY-PASS MOTORS
110V
Max Airflow= 224 CFM
Max Depression= 98 inH2O



OPTIONAL H 14 HEPA FILTER



JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.



DIRTY FILTER INDICATOR

A LED light indicates when the filter is clogged and it's ready to be cleaned.

RC OPTIONAL

Remote control by power tool



DETACHABLE BIN ON WHEELS

6 gal

Conical polyester cartridge filter
M CLASS

5425.01 in²



INLET WITH SLIDING DAMPER

Used in combination with the Jet Clean system




TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
XM 20	2 By - Pass	2,2	110 60	98	224	1.97	5425.01	6	20.31 X 21.46	39.13	84

XM 35 JET CLEAN® | XM 35 JET CLEAN® LP



2,2 HP

POWER

5425.01 in²

FILTER

Longopac or
12 gal Bin

CAPACITY

— Small single-phase dust extractor with two by-pass motors, large filtering surface and semi-automatic filter cleaning system. It is ideal for dry and difficult dust. It can be connected to a power tool or to a floor polisher. The unit can also be fitted with a Longopac® bagging system.




OPTIONAL H 14 HEPA FILTER



2 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 224 CFM
Max Depression= 98 inH2O



JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.



DIRTY FILTER INDICATOR

A LED light indicates when the filter is clogged and it's ready to be cleaned.

RC OPTIONAL

Remote control by power tool



Conical polyester cartridge filter
PTFE M CLASS



5425.01 in²



Longopac®
bagging system
or 12 gal bin

TANGENTIAL INLET WITH SLIDING DAMPER

Used in combination with the Jet Clean system



TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
35	2 By - Pass	2,2	110 60	98	224	1.97	5425.01	12	23.03 X 21.46	50.59	99
35 LP	2 By - Pass	2,2	110 60	98	224	1.97	5425.01	Longopac	23.03 X 21.46	54.92	99

XM 35 FLOOR PREPARATION | LP



2,2 HP
POWER

5425.01 in²
FILTER

Longopac or 12 gal Bin
CAPACITY

— Compact single-phase dust extractor with two by-pass motors, large filtering surface and automatic vibration filter cleaning system. With metal jacket filter protection it is ideal for concrete dust. It can be connected to a power tool or to a floor grinder. The unit can be dropdown or bedded for easy transport.



2 POWERFUL BY-PASS MOTORS
110V
Max Airflow= 224 CFM
Max Depression= 98 inH2O



RUBBER FEET
to transport the unit bedded



SLIDING SYSTEM
to decrease the dimensions
for easy transport



RC STANDARD
Remote control
by power tool

Tangential inlet
with metal jacket system to
PROTECT THE FILTER



Cartridge cleaning
vibration system

Conical polyester
cartridge filter
M CLASS



Possibility to improve
to **H13 HEPA** filter



5425.01 in²



Longopac®
bagging system

PUSH DOWN


BIGGER WHEELS
to run on all construction sites


TECHNICAL DATA


	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
FP	2 By - Pass	2,2	110 60	98	224	1.97	5425.01	12	23.03 X 21.46	54.92	99
FP LP	2 By - Pass	2,2	110 60	98	224	1.97	5425.01	Longopac	23.03 X 21.46	54.92	99

MINIBULL



2,2 HP

POWER

2325 in²

FILTER

12 gal Bin

CAPACITY

— Small single-phase industrial vacuum with two by-pass motors, large filtering surface and semi-automatic filter cleaning system. It is ideal for dry and difficult dust. It can be connected to a power tool or to a floor polisher. The vacuum cleaner can also be fitted with a Longopac® bagging system.




OPTIONAL H 14 HEPA FILTER



2 POWERFUL BY-PASS MOTORS
110V
Max Airflow= 224 CFM
Max Depression= 98 inH2O

DIRTY FILTER INDICATOR

A LED light indicates when the filter is clogged and it's ready to be cleaned.



MANUAL SHAKER CLEANING SYSTEM

Smart handle for shaking the filter aggressively to release dust.

RC OPTIONAL

Remote control by power tool



12 gal

DETACHABLE BIN ON WHEELS



M CLASS Stellar filter

2325 in²



MTF OPTIONAL


For difficult and sticky dust.


TECHNICAL DATA


	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	cm ²	gal	in	in	lb
MINIBULL	2 By - Pass	2,2	110 60	98	224	2.76	2325	12	21.65 X 24.41	48.82	99

M 65/100



3,3 HP

POWER

3720.01 in²

FILTER

17/26 gal Bin

CAPACITY

— Single-phase dust extractor with three by-pass motors, excellent Class M filtering surface (1 μ filtration efficiency) and manual filter cleaning system. It is ideal for dusts, solids and shavings. The vacuum cleaner can be fitted with a Longopac® bagging system.



2 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O



M CLASS
Stellar filter



MTF OPTIONAL
For difficult and sticky dust.



3720.01 in²



MANUAL SHAKER CLEANING SYSTEM

Smart handle for shaking the filter aggressively to release dust.


OPTIONAL TANGENTIAL INLET



17|26 gal

DETACHABLE BIN ON WHEELS

INLET WITH DEFLECTOR





TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 65	3 By - Pass	3,3	110 60	98	336	2.76	3720.01	17	25.98 X 31.50	59.65	176
M 100	3 By - Pass	3,3	110 60	98	336	2.76	3720.01	26	25.98 X 31.50	59.65	176

M 100 LONGOPAC



3,3 HP

POWER

3720.01 in²

FILTER

Longopac


CAPACITY

— Single-phase dust extractor with three by-pass motors, excellent Class M filtering surface (1 μ filtration efficiency) and manual filter cleaning system. It is ideal for dusts, solids and shavings. The vacuum cleaner is fitted with a practical Longopac® bagging system.



2 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O

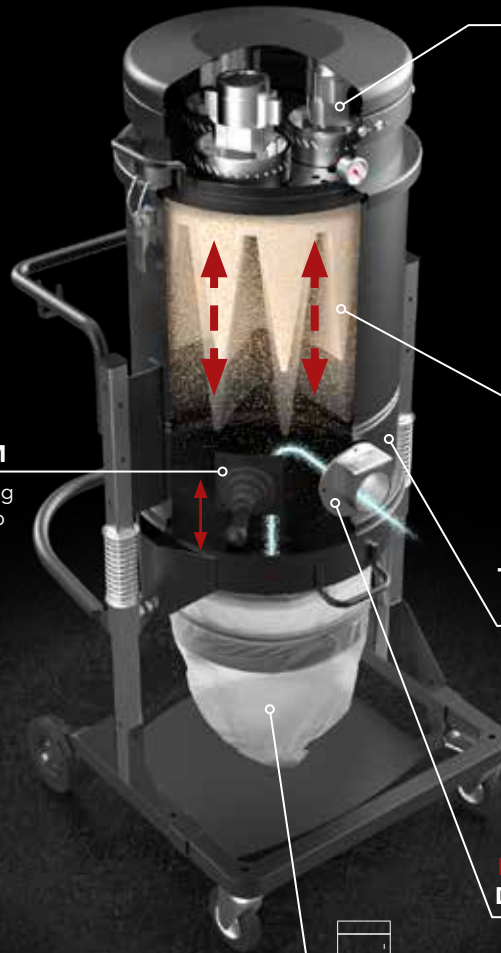

M CLASS
Stellar filter



MTF OPTIONAL
For difficult and sticky dust.




3720.01 in²

OPTIONAL TANGENTIAL INLET



INLET WITH DEFLECTOR



MANUAL SHAKER CLEANING SYSTEM

Smart handle for shaking the filter aggressively to release dust.



Longopac® bagging system

TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 100 LP	3 By - Pass	3,3	110 60	98	336	2.76	3720.01	Longopac	25.98 X 31.50	59.65	154

M 65/100 JET CLEAN® TAN



3,3 HP
POWER

5425.01 in²
FILTER

17/26 gal Bin
CAPACITY

— Single-phase dust extractor with three by-pass motors, large filtering surface and semi-automatic filter cleaning system. It is ideal for dry and difficult dust. It can be connected to a floor polisher or work in other situations where the dust is fine and binding.




3 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O



JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.




DETACHABLE BIN ON WHEELS



Conical polyester cartridge filter
M CLASS



5425.01 in²

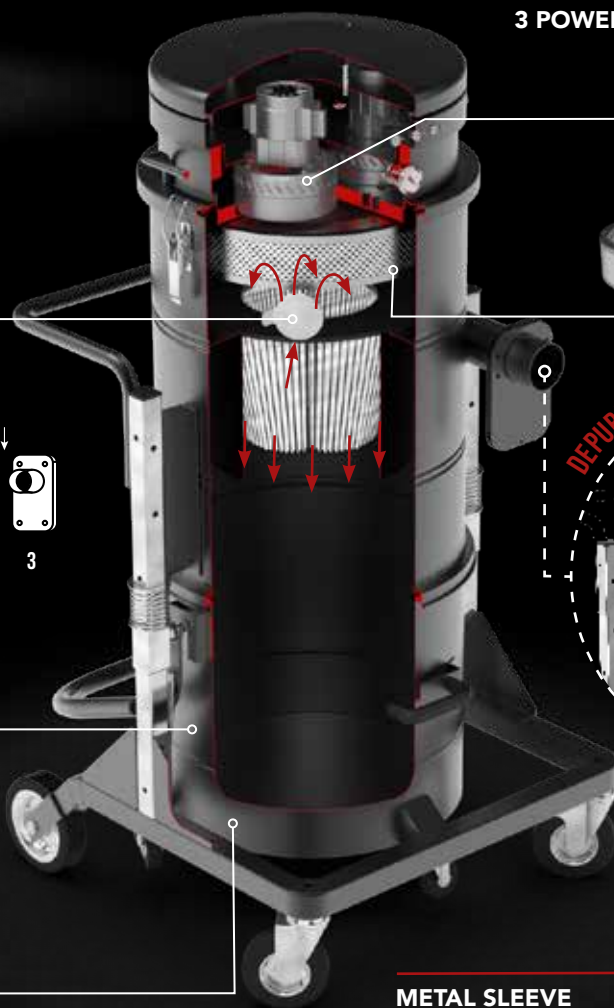

METAL SLEEVE FILTER PROTECTION


EFFICIENT CYCLONIC EFFECT


TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 65	3 By - Pass	3,3	110 60	98	336	1.97	5425.01	17	25.98 X 31.50	51.18/59.65	176
M 100	3 By - Pass	3,3	110 60	98	336	1.97	5425.01	26	25.98 X 31.50	51.18/59.65	176

M 100 JET CLEAN[®] TAN LONGOPAC



3,3 HP

POWER

5425.01 in²

FILTER

Longopac

CAPACITY

— Single-phase dust extractor with three by-pass motors, large filtering surface and semi-automatic filter cleaning system. It is ideal for dry and difficult dust. It can be connected to a floor polisher or work in other situations where the dust is fine and binding. The vacuum cleaner is fitted with a practical Longopac[®] bagging system.



3 POWERFUL BY-PASS MOTORS


110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O


STANDARD H 14 HEPA FILTER



JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.




Conical polyester cartridge filter
M CLASS



5425.01 in²



Longopac[®] bagging system

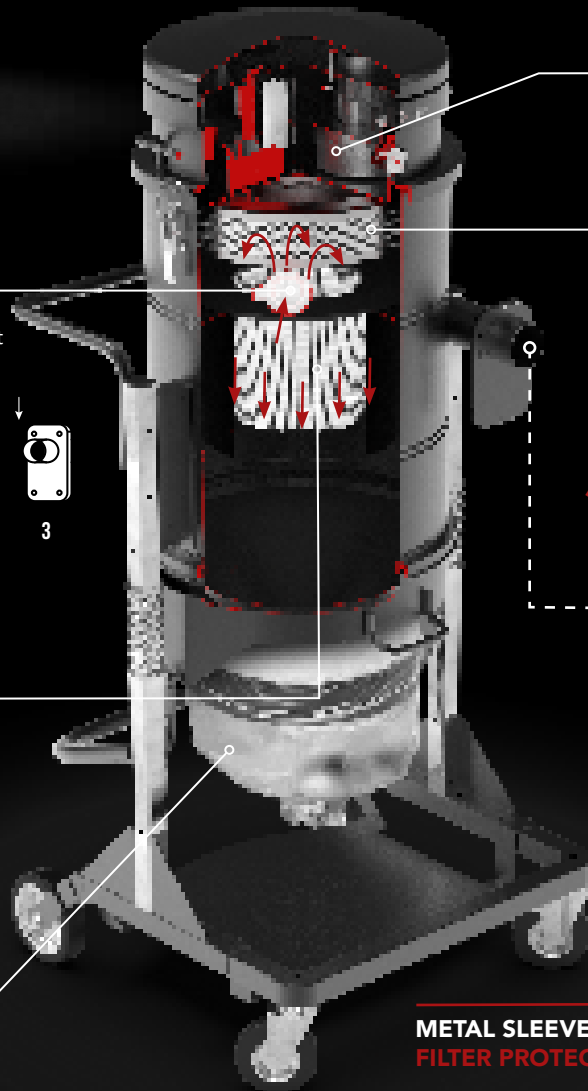

METAL SLEEVE FILTER PROTECTION

EFFICIENT CYCLONIC EFFECT

TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 100 LP	3 By - Pass	3,3	110 60	98	336	1.97	5425.01	Longopac	25.98 X 31.50	59.65	154

M 65 SP

3,3 HP
POWER

13950 in²
FILTER

17/26 gal Bin
CAPACITY

— Single phase 3 motor mobile unit designed to manage big quantities of fine dust. A reverse jet filter cleaning system keeps the filter cartridges constantly cleaned. The material is collected directly into a 17 or 26 gal detachable bin on wheels.



SP SYSTEM

Ideal for large quantities of fine and difficult dusts. The cleaning system is completely automatic.



3 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O



OPTIONAL COMPRESSOR

If the compressed air is not available it's possible to install a compressor on board.



SP SYSTEM CONTROLLER

The SP system is controlled by an electronic controller installed on board.



OPTIONAL H 14 HEPA FILTER

22.000 cm²




OPTIONAL TANGENTIAL INLET

17/26 gal

DETACHABLE BIN ON WHEELS




INLET WITH DEFLECTOR




TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 65	3 By - Pass	3,3	110 60	98	336	2.76	13950	17	25.98 X 31.50	59.65	176
M 100	3 By - Pass	3,3	110 60	98	336	2.76	13950	26	25.98 X 31.50	59.65	176

M 65 SP LONGOPAC

3,3 HP

POWER

13950 in²

FILTER

Longopac

CAPACITY

— Single phase 3 motor mobile unit designed to manage big quantities of fine dust. A reverse jet filter cleaning system keeps the filter cartridges constantly cleaned. The material is collected directly into an endless Longopac® bagging system.



SP SYSTEM

Ideal for large quantities of small and difficult dusts. The cleaning system is completely automatic.



3 POWERFUL BY-PASS MOTORS

110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O



SP SYSTEM CONTROLLER

The SP system is controlled by an electronic controller installed on board.



OPTIONAL COMPRESSOR

If the compressed air is not available it's possible to install a compressor on board.



OPTIONAL H 14 HEPA FILTER


22.000 cm²



OPTIONAL TANGENTIAL INLET



INLET WITH DEFLECTOR



LONGOPAC BAGGING SYSTEM

TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
M 100 LP	3 By - Pass	3,3	110 60	98	336	2.76	13950	Longopac	25.98 X 31.50	59.65	154

TX 300 | 400 P | 550 P | 750

PUMA 15 P | 18 P

From 3 kW to 7,5 kW

38.000 cm²

26 gal Bin

POWER **FILTER** **CAPACITY**

— Portable dust extractor for applications requiring more power. It is fitted with a large standard Class M polyester filter and safety relief valve. The material is collected in a practical 26 gal detachable container on wheels.



OPTIONAL COMPRESSOR

If the compressed air is not available it's possible to install a compressor on board.



SP SYSTEM

Ideal for large quantities of small and difficult dusts. The cleaning system is completely automatic.



SP SYSTEM CONTROLLER


The SP system is controlled by an electronic controller installed on board.



OPTIONAL TANGENTIAL INLET



INLET WITH DEFLECTOR



SECURITY VALVE

Pressure relief valve.



SIDE CHANNEL BLOWER

Designed to work 24/7 without maintenance

- From 4.6 to 20 HP
- High vacuum up to 169 inH2O
- High flow up to 740 CFM
- Noise level <76 db
- Protection from IP 55 to IP 68



26 gal

DETACHABLE BIN ON WHEELS

TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	in ²	gal	in	in	lb
TX 300	Side Channel Blower	4.6	480 60	110	300	2.76	13.950	26	25.6 X 43.3	55.12	287
TX 400 P	Side Channel Blower	6.2	480 60	60	350	2.76	13.950	26	25.6 X 43.3	55.12	309
TX 550 P	Side Channel Blower	8.4	480 60	112	382	2.76	13.950	26	25.6 X 43.3	55.12	342
TX 750	Side Channel Blower	11.5	480 60	169	382	2.76	13.950	26	25.6 X 43.3	55.12	419
PUMA 15P	Side Channel Blower	13	480 60	129	647	3.94	6975	46	33.5 X 61	77.95	595
PUMA 18P	Side Channel Blower	20	480 60	135	740	3.94	6975	46	33.5 X 61	77.95	783

WD 132 | 132 P | 133



From 2,2 HP to 3,3 HP

Liquid and solid filters

34 gal Bin

POWER **FILTER** **CAPACITY**

— Single-phase industrial vacuum with three by-pass motors, designed to vacuum liquids, even if they contain debris and light sludge. The version with a submersible discharge pump can be chosen to continuously vacuum and discharge even from a few metres away.



2 POWERFUL BY-PASS MOTORS
110V
Max Airflow= 336 CFM
Max Depression= 98 inH2O



LIQUID AND SOLID FILTERS

Polypropylene: filters and separates any solid materials eventually present in the vacuumed liquids.
Polyester: used when vacuuming dust.
Both filters are washable.

INLET WITH DEFLECTOR

FLOATING SYSTEM

The floating system is used to stop the aspiration when the liquid reaches the limit capacity.



LIQUID LEVEL INDICATOR

Check the liquid level inside the bin from the outside of the vacuum cleaner.



OPTIONAL WATER PUMP

Continuous discharge pump.



34 gal

DISCHARGE SYSTEM

Discharge happens by gravity. At the bottom of the machine there is a valve, which ensures easy discharge of the liquids and particles collected inside the bin.



TECHNICAL DATA

	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	SURFACE AREA	CAPACITY	DIMENSIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM						
WD 132	3 By - Pass	2,2	110 60	98	224	2.76	-	34	22.83 X 20.87	45.67	84
WD 132 P	3 By - Pass	2,2	110 60	98	224	2.76	-	34	22.83 X 20.87	45.67	104
WD 133	3 By - Pass	3,3	110 60	98	336	2.76	-	34	22.83 X 20.87	45.67	88



1,1 HP

POWER

M Class

FILTER

8 gal Bin

CAPACITY

— The KUBE vacuum cleaner allows you to combine strong suction power with double filter filtration that prevents clogging. Works with any power tool max 1500 w. The suction starts when the tool is turned on and continues for a few moments after the power tool is turned off thanks to the integrated AUTO STOP function to ensure the suction of residues.



M CLASS FILTER

With cartridge cleaning vibration system



EXIT FILTER

Filters the air that exit the vacuum cleaner.



BLOWER MODE

Insert the attachment in the back of the vacuum to blow air instead of sucking air.



RC SHUKO

Remote control by power tool



SUCTION INLET

KUBE ACCESSORIES



TECHNICAL DATA


	MOTORS TYPE	POWER	VOLTAGE FREQUENCY	MAXIMUM VACUUM	MAXIMUM AIR FLOW	INLET	CAPACITY	DIMENTIONS	HEIGHT	WEIGHT
		HP	V - Hz	inH2O	CFM	Ø in	gal	in	in	lb
KUBE	1 By - Pass	1.1	110 60	88	112	1.5	8	20 X 14.2	22	24

SEPARATORS

Trolley-mounted cyclonic separators (Ø15.35 and Ø17.71 inlets) with high efficiency dust abatement in sturdy painted metal. The separators are fitted with an automatic Longopac[®] bagging system.



LONGOPAC[®] SEPARATOR WITH CYCLONE Ø15.35

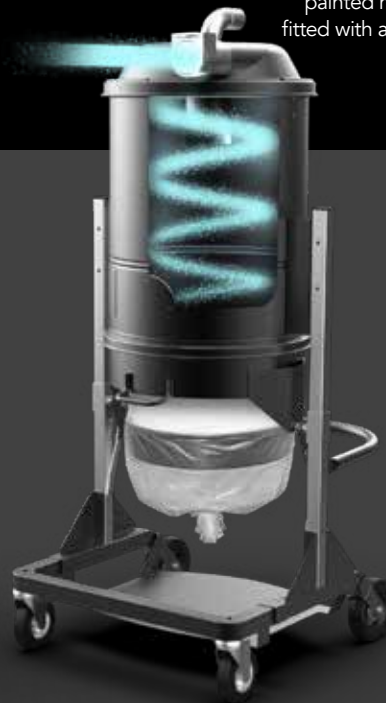

LONGOPAC[®] SEPARATOR WITH CYCLONE Ø17.71


OTHER ACCESSORIES




ANTISTATIC RUBBER CONIC SECTION



DOUBLE BEND TUBE FOR FLOOR BRUSH



FLOOR BRUSH WITH BRISTLES



FLOOR SQUEEGEE WITH RUBBER STRIPS



PUR PIPE Ø 40, 50



EVA FLEX PIPE Ø 40, 50



PVC ROUND BRUSH



FIXED VACUUMING TOOL



ANTISTATIC FLAT PIPE

**GET YOUR
3 YEARS WARRANTY NOW**

WITH YOUR VACUUM CLEANER ORDER, IF YOU PURCHASE THE CORRESPONDING REPLACEMENT FILTER

**HERE
FOR THE
TOUGHEST
JOB**





BECAUSE SOMETIMES YOU NEED A GAME CHANGER



DEPURECO INDUSTRIAL VACUUMS SRL

19121 MARKETPLACE AVENUE, BUILDING 1, SUITE 165

PLUM CREEK BUSINESS PARK - KYLE, TEXAS 78640

+1 737 70 44 347

INFO@DEPURECOUSA.COM - WWW.DEPURECOUSA.COM