





XM35 TAN JC LP H

Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640


www.depurecousa.com
info@depurecousa.com

2.2 HP

POWER

5425 in²

FILTER

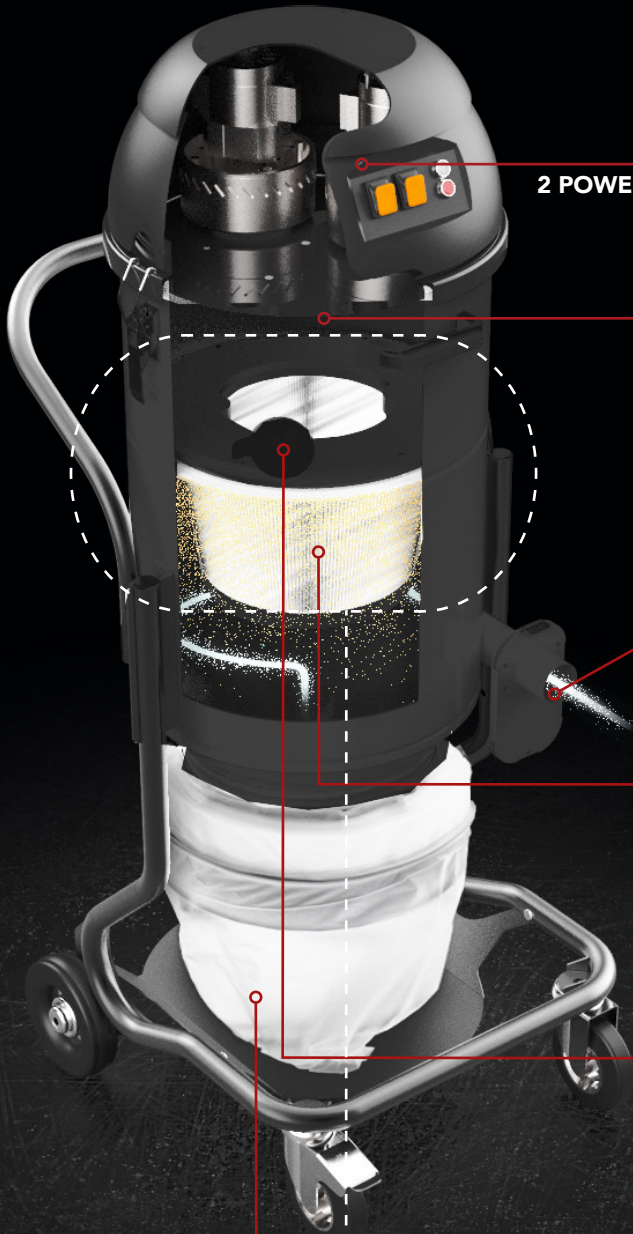Longopac

CAPACITY



2 POWERFUL BY-PASS MOTORS
110V | 60 Hz
Max Airflow= 224 CFM
Max Depression= 98 inH2O



STANDARD H 14 HEPA FILTER
3410 in²



TANGENTIAL INLET WITH SLIDING DAMPER

Used in combination with the Jet Clean system



Conical polyester cartridge filter
M CLASS

5425 in² 

JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.



Longopac[®] bagging system


CYCLON FOR FILTER PROTECTION

The metal cyclone helps slowing down the dust and protects the filter

EFFICIENT CYCLONIC EFFECT

The dust, entering the vacuum, experiences a cyclonic effect that slows down the powder making it fall into the Longopac[®] bagging system.

CYCLONIC SYSTEM

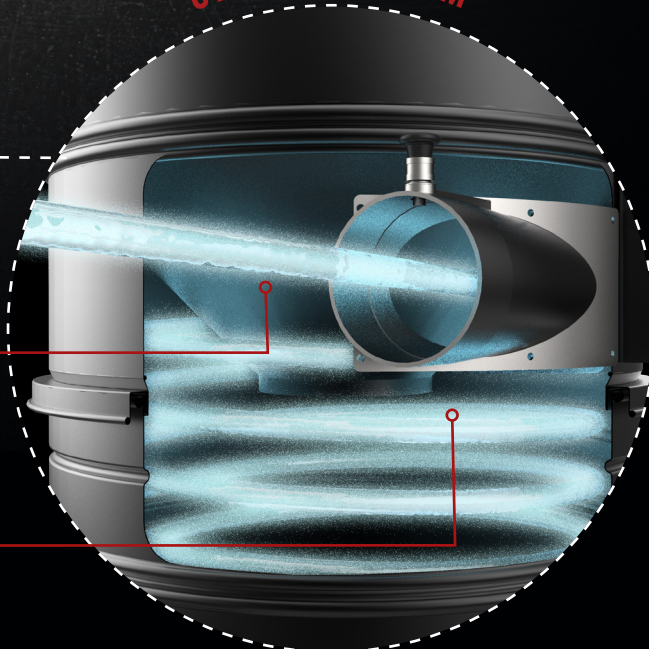

SPEC SHEET

	Units	XM 35 TAN JC LPH
Motors Type		2 - By-Pass
Power	HP	2.2
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	224
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	Longopac®
Dimensions	in	23.03 X 21.46
Height	in	54.92
Weight	lb	99
Primary filter		
Type		Conical cartridge
Surface area	in²	5.500
(Class EN 60335-2-69)		IFA/BGIA M-PES
Media		PTFE
Filter cleaning System		Jet Clean®
Absolute filter		
Surface area	in²	3.500
(Class - EN 1822)		H14
Media		Fiberglass

OPTIONAL



AB

Accessory basket



GRD

Grounding

ACCESSORIES



P12302

Steel reductor connection
1,96 > 1,57 in



P13640

WD Accessory kit
Ø 1,57 in



P11883

Longopac roll spare part