



# M100 JC H TAN

**Depureco Industrial Vacuums USA**

19121 Marketplace Avenue, Building 1, Suite 165  
Plum Creek Business Park • Kyle • TX 78640

[www.depurecousa.com](http://www.depurecousa.com)  
[info@depurecousa.com](mailto:info@depurecousa.com)

3,3 HP  
**POWER**

5425 in<sup>2</sup>  
**FILTER**

26 gal  
**CAPACITY**



**3 POWERFUL BY-PASS MOTORS**

120V | 60 Hz  
Max Airflow= 336 CFM  
Max Depression= 98 inH2O



**STANDARD H 14 HEPA FILTER**  
4340 in<sup>2</sup>



**TANGENTIAL INLET WITH SLIDING DAMPER**

Used in combination with the Jet Clean system

Conical polyester cartridge filter  
**M CLASS**



5425 in<sup>2</sup>




**JET CLEAN CLEANING SYSTEM**

Clean the filter with a powerful jet of air without stopping the unit.



**DEPURECO EXCLUSIVE CYCLONIC SYSTEM**

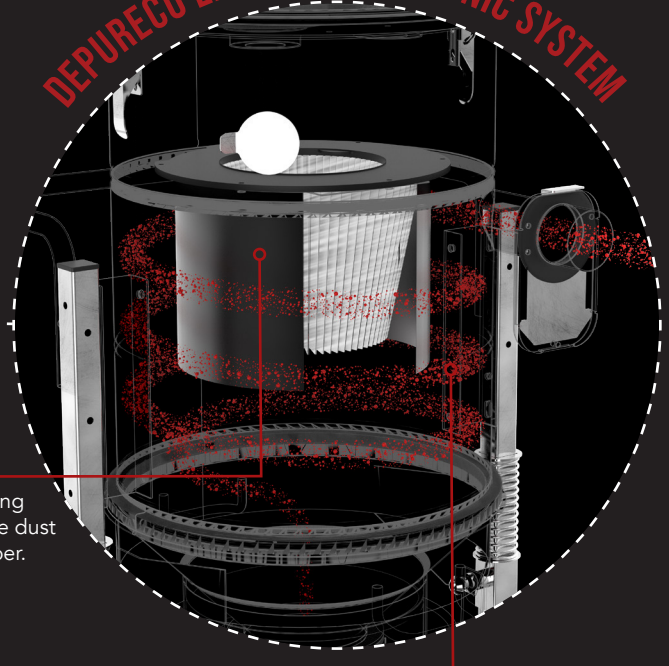

**METAL SLEEVE FILTER PROTECTION**

The metal sleeve, surrounding the filter, protects it from the dust entering the vacuum chamber.

**EFFICIENT CYCLONIC EFFECT**

The dust, entering the vacuum, experiences a cyclonic effect that slows down the powder making it fall into the Longopac® bagging system.

26 gal  
Bin capacity




# SPEC SHEET

	Units	M 100 JCH TAN
Motors   Type		3 - By-Pass
Power	HP	3,3
Voltage   Frequency	V/Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	336
Inlet	Ø in	2.75
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	26
Dimensions	in	25.98 X 31.50
Height	in	59.65
Weight	lb	154
<b>Primary filter</b>		
Type		Star filter
Surface area   Diameter (Class EN 60335-2-69)	in <sup>2</sup>   in	3720.01 M Class
Media		Polyester
Filter cleaning		Manual shaker
<b>Absolute filter</b>		
Surface area	in <sup>2</sup>	4,340
<b>(Class - EN 1822)</b>		H14
Media		Fiberglass

## OPTIONAL



**AB**  
Accessory basket

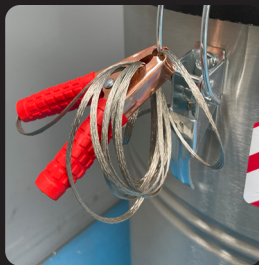

**GRD**  
Grounding

## OPTIONAL FILTERS



**CONICAL POLYESTER**  
Hepa 13

## ACCESSORIES



**STEEL CONNECTOR**  
2.75 / 2 in



**Wet & Dry Kit**  
Ø 2 in



**Starter Kit**  
Ø 2 in