



M100 JC H TAN

Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com



4 HP
POWER

5425 in²
FILTER

26 gal
CAPACITY



3 POWERFUL BY-PASS MOTORS

120V | 60 Hz
Max Airflow= 345 CFM
Max Depression= 94 inH2O



STANDARD H 14 HEPA FILTER

4340 in²



TANGENTIAL INLET WITH SLIDING DAMPER

Used in combination with the Jet Clean system

Conical polyester cartridge filter
M CLASS



5425 in²




JET CLEAN CLEANING SYSTEM

Clean the filter with a powerful jet of air without stopping the unit.



DEPURECO EXCLUSIVE CYCLONIC SYSTEM

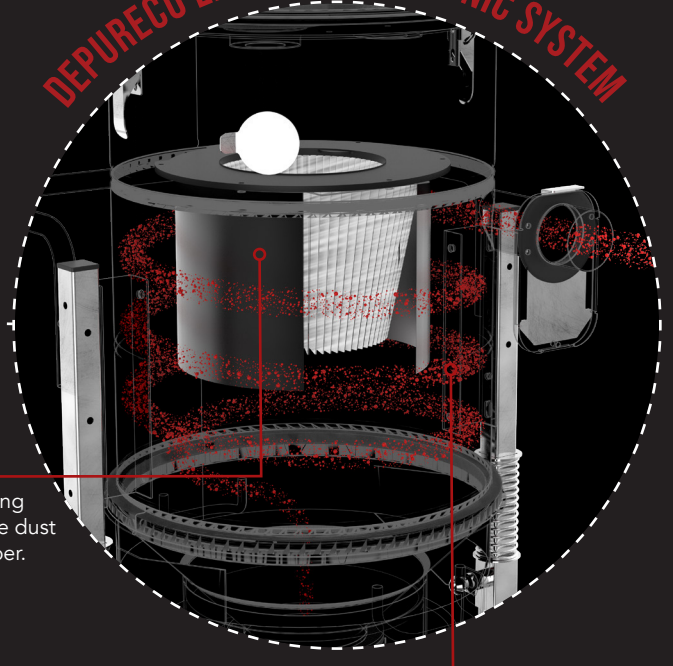

METAL SLEEVE FILTER PROTECTION

The metal sleeve, surrounding the filter, protects it from the dust entering the vacuum chamber.

EFFICIENT CYCLONIC EFFECT

The dust, entering the vacuum, experiences a cyclonic effect that slows down the powder making it fall into the Longopac® bagging system.

26 gal
Bin capacity




SPEC SHEET

	Units	M 100 JCH TAN
Motors Type		3 - By-Pass
Power	HP	4
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	94
Maximum air flow	CFM	345
Inlet	Ø in	2.75
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	26
Dimensions	in	25.98 X 31.50
Height	in	59.65
Weight	lb	154
Primary filter		
Type		Star filter
Surface area Diameter (Class EN 60335-2-69)	in ² in	3720.01 M Class
Media		Polyester
Filter cleaning		Manual shaker
Absolute filter		
Surface area	in ²	4,340
(Class - EN 1822)		H14
Media		Fiberglass

OPTIONAL



AB
Accessory basket

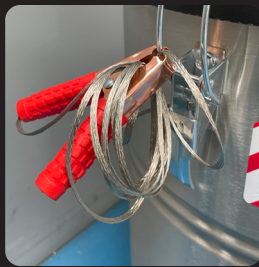

GRD
Grounding

OPTIONAL FILTERS



CONICAL POLYESTER
Hepa 13

ACCESSORIES



STEEL CONNECTOR
2.75 / 2 in



Wet & Dry Kit
Ø 2 in



Starter Kit
Ø 2 in