



# M100 NFPA AM

**Depureco Industrial Vacuums USA**


19121 Marketplace Avenue, Building 1, Suite 165  
Plum Creek Business Park • Kyle • TX 78640

[www.depurecousa.com](http://www.depurecousa.com)  
[info@depurecousa.com](mailto:info@depurecousa.com)

4 HP  
**POWER**

5270 in<sup>2</sup>  
**FILTER**

26 gal  
**CAPACITY**

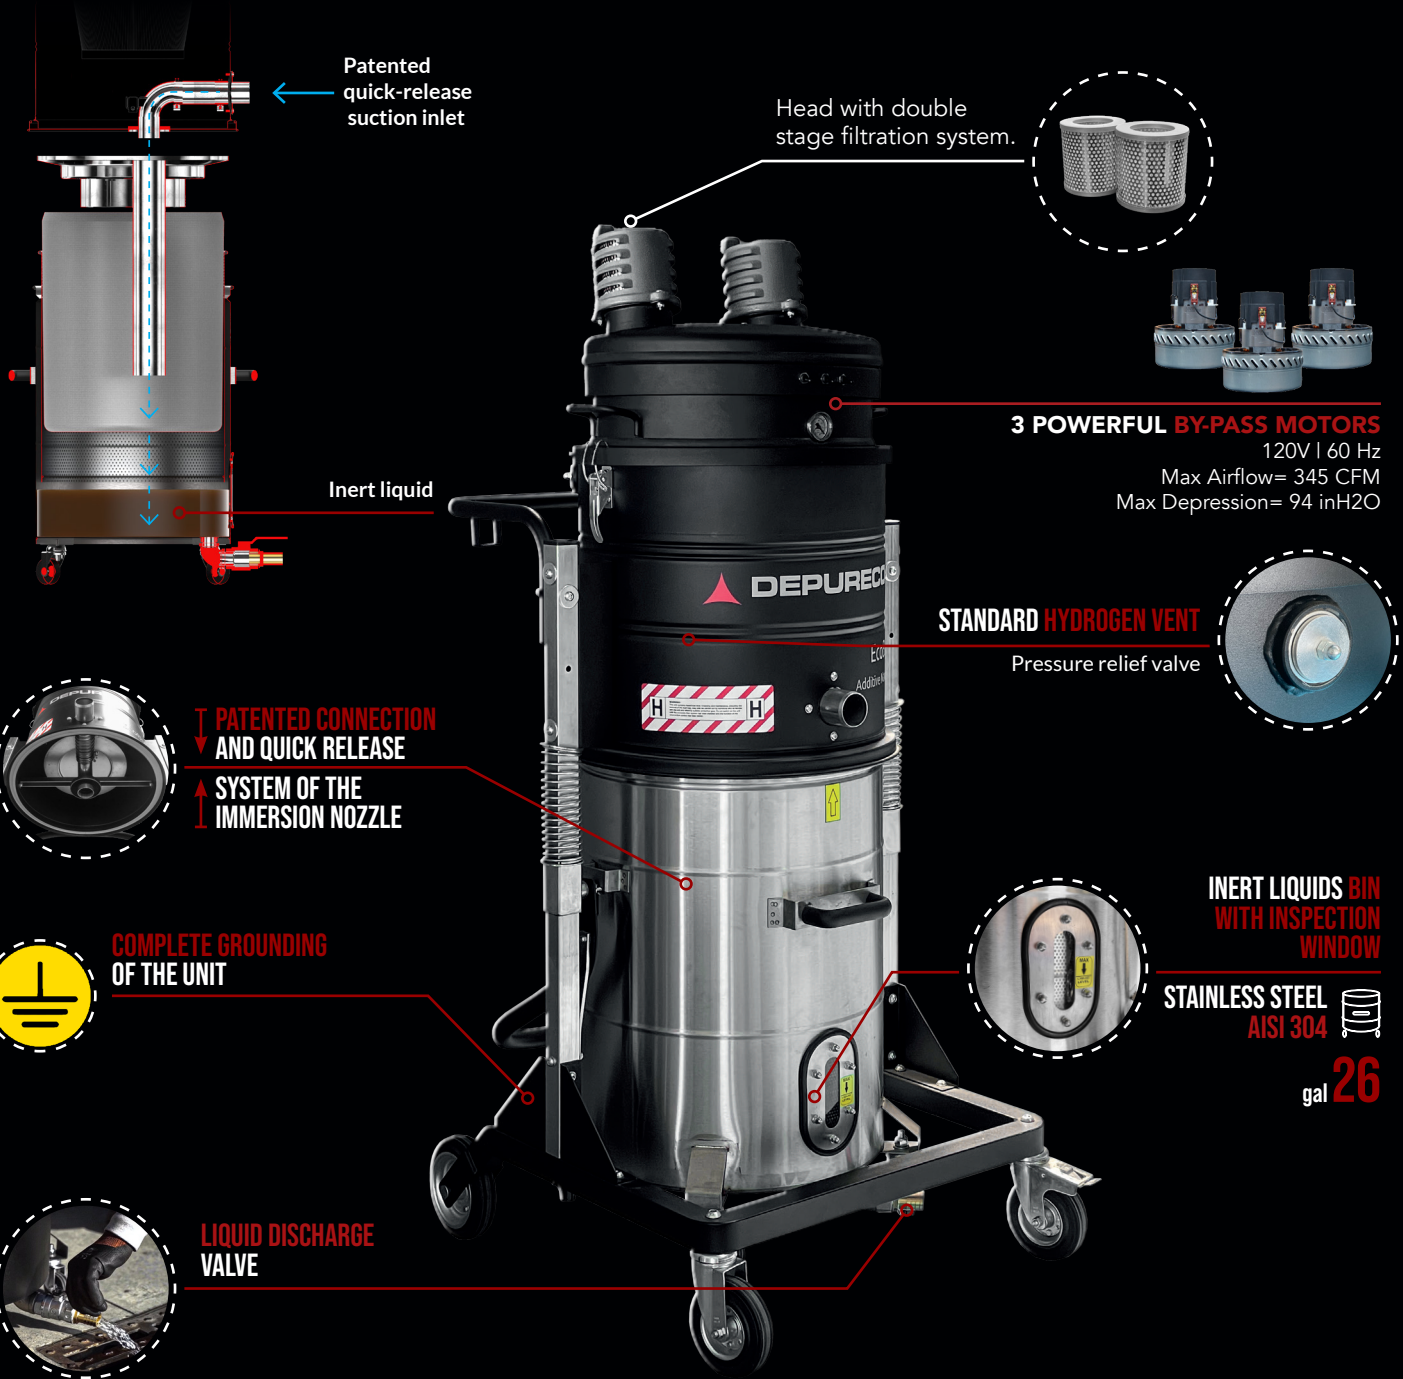

Patented quick-release suction inlet

Head with double stage filtration system.

Inert liquid

**3 POWERFUL BY-PASS MOTORS**

120V | 60 Hz  
Max Airflow= 345 CFM  
Max Depression= 94 inH2O

**STANDARD HYDROGEN VENT**

Pressure relief valve

**PATENTED CONNECTION AND QUICK RELEASE SYSTEM OF THE IMMERSION NOZZLE**

**COMPLETE GROUNDING OF THE UNIT**

**LIQUID DISCHARGE VALVE**

**INERT LIQUIDS BIN WITH INSPECTION WINDOW**

**STAINLESS STEEL AISI 304**

gal **26**

# SPEC SHEET

	Units	M100 AM
Suction type		By-Pass motor
Power	HP	4   1 ~
Voltage   Frequency	V Hz	110-230   50
Maximum vacuum	inH2O	94
Maximum air flow	CFM	345
Inlet	Ø in	2.76
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	26
Dimensions	in	26 x 31.5
Height	in	59.65
Weight	lb	176
<b>Primary filter</b>		
Type		Cartridge filter
Surface area	in <sup>2</sup>   in	5270
(Class EN 60335-2-69)		M Class
Media		Antistatic polyester
<b>Absolute filter - Optional</b>		
(Class - EN 1822)		H14
Media	in <sup>2</sup>	Fiberglass

# ACCESSORIES



**ANTISTATIC STARTER KIT**  
Ø 1.96 in



**ANTISTATIC KIT PRO**  
Ø 1.96 in