

RAM OIL 280 MP





Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640


www.depurecousa.com
info@depurecousa.com

 Power: 4 HP

 Liquid capacity: 74 gal
Solid capacity: 11 gal

 Suction time: 74 gal/min
Dumping time: 74 gal/min

3 By-Pass motors
120V/60 Hz
Max Airflow = 345 CFM
Max Depression = 94 inH2O
Suction speed 74 gal/min



Oil proof cartridge for oil mist



Handy accessory basket

PUMP: External discharging pump
Speed discharge system 74 gal/min


Pivoting $\varnothing 7.7$ in
sturdy wheels

360° sturdy rotating suction Inlet $\varnothing 2$ in

Metal Swarf collecting grid.
11 gal capacity
PPL Filter (150 μ)





74 gal capacity





- Optional -
Stainless steel AISI 316
inspection door

HIGHLY TRANSPORTABLE

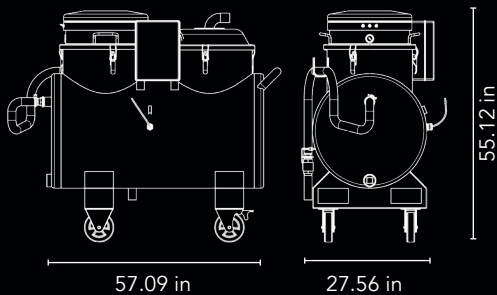

 Weight: 154 lbs

COMPACT AND EASY TO HANDLE

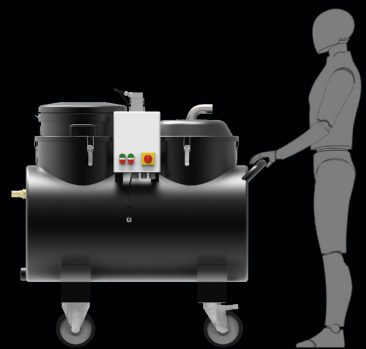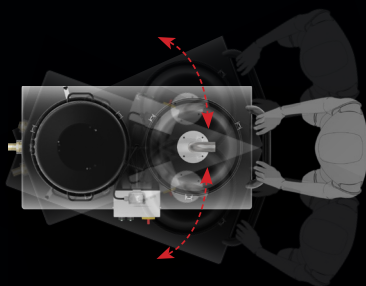

SPEC SHEET

	Units	RAM OIL 280 MP
Motors Type		3 - By-Pass
Power	HP	4
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	94
Maximum air flow	CFM	345
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	72
Liquid capacity	gal	74
Solid capacity	gal	11
Dimensions	in	27.56 x 57.09
Height	In	55.12
Weight	lb	333
Suction time	gal/min	74
Dumping time	gal/min	74
Discharge system		
Type		External pump
Power	HP	1
Voltage/Frequency	V/Hz	110/60

INCLUDED



PPL disposal filter 150
µ efficiency



TNT filter



Oil & swarf KIT

ACCESSORIES



Oil & swarf KIT PRO