


M100 LP H




Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com

3.3 HP

POWER

3.720 in²

FILTER

Longpac

CAPACITY




3 POWERFUL BY-PASS MOTORS
120V | 60 Hz
Max Airflow= 336 CFM
Max Depression= 98 inH2O



STANDARD H 14 HEPA FILTER



4340 in²

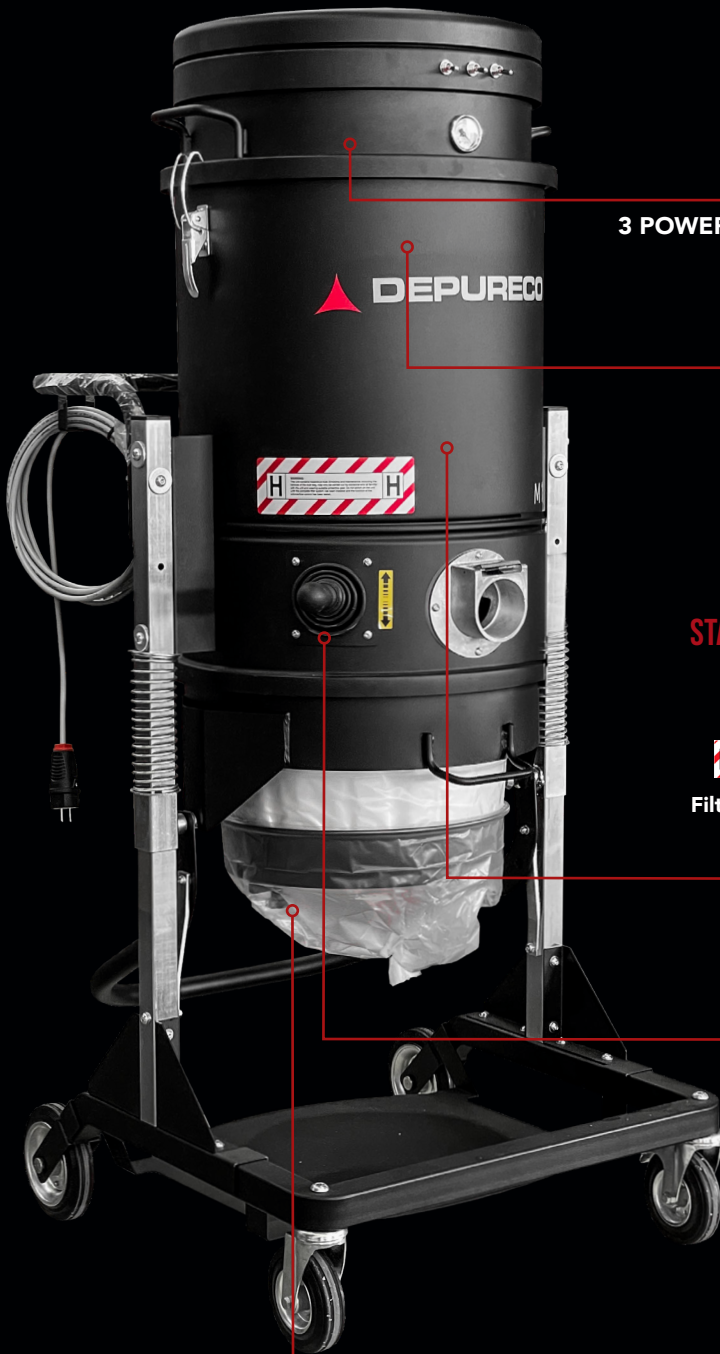

STANDARD M CLASS FILTER



Filter surface
3.720 in²



OPTIONAL MTF FILTER




Filter surface
3.720 in²



MANUAL FILTER CLEANING SYSTEM


Easily clean the filter with an ergonomic system.




HIGHLY TRANSPORTABLE



Longpac® bagging system



29.2 in



25.4 in

59.2 in



Weight: 154 lbs


SPEC SHEET

	Units	M 100 LP
Motors Type		3 - By-Pass
Power	HP	3,3
Voltage Frequency	V Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	336
Inlet	Ø in	2,75
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	Longopac®
Dimensions	in	25.98 X 31.50
Height	in	59.65
Weight	lb	154
Primary filter		
Type		Star filter
Surface area Diameter (Class EN 60335-2-69)	in ² in	3.800
Media		M Class
Filter cleaning		Polyester
		Manual shaker
Absolute filter		
Surface area	in ²	4.340
(Class - EN 1822)		H14
Media		Fiberglass

OPTIONAL FILTERS



BFL
Increased M class filter



ANT M
Antistatic filter



MTF
Teflon filter



NOMEX
482° F Resistant filter



PTFE
PTFE filter 409028,6 ft²

OPTIONAL



AB
Accessory basket



GRD
Grounding



TAN
Tangential inlet + cyclone

ACCESSORIES



Iron reducer 2,75/1,96 in
P10866



Wet & Dry kit 1,96 in
P11887



Starter kit 1,96 in
P12350