

RAM OIL 500 MP





Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com

 Power: 3.3 HP

 Liquid capacity: 132 gal
Solid capacity: 11 gal

 Sucking time: 74 gal/min
Dumping time: 74 gal/min

3 By-Pass motors
120V/60 Hz
Max Airflow = 336 CFM
Max Depression = 98 inH2O
Suction speed 74 gal/min

360° sturdy rotating suction inlet Ø 2 in

Metal Swarf collecting grid.
11 gal capacity
PPL Filter (150 µ)

Oil proof cartridge for oil mist

Handy accessory basket

PUMP: External discharging pump
Speed discharge system 74 gal/min


Pivoting Ø 7.7 in
sturdy wheels


132 gal capacity

- Optional -



Stainless steel AISI 316
inspection door

HIGHLY TRANSPORTABLE

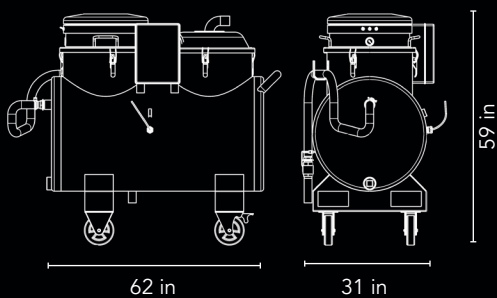

 Weight: 425 lbs

EASY TO HANDLE

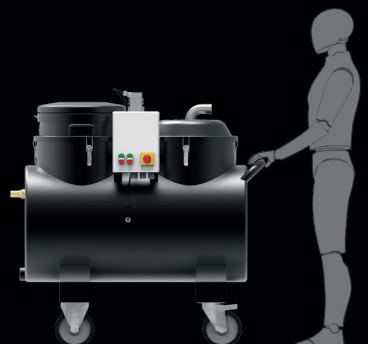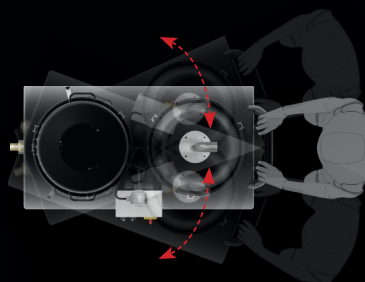

SPEC SHEET

	Units	RAM OIL 500 MP
Motors Type		3 - By-Pass
Power	HP	3.3
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	336
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	72
Liquid capacity	gal	132
Solid capacity	gal	11
Dimensions	in	31 x 62
Hight	In	59
Weight	lb	425
Suction time	gal/min	74
Dumping time	gal/min	74
Discharge system		
Type		External pump
Power	HP	1
Voltage/Frequency	V/Hz	110/60

INCLUDED



**PPL disposal filter 150
µ efficiency**



TNT filter



Oil & swarf KIT

ACCESSORIES



Oil & swarf KIT PRO